

2021 QATAR INTERNATIONAL BAJA

CoC Communication #1 (06.09.2021)


Navigation Equipment

Stella NAV/GPS equipment will be used for the Baja and should be fitted to the motorcycle, quad or SSV in a safe and stable position in view and accessible to the rider / codriver.

Please find below photo and dimensions of the supplied bracket for the Stella NAV/GPS device and attached its installation kit manual.

The bracket – to be collected at administrative checks – should be fitted and secured in its final position before technical scrutineering and be approved by the Scrutineers.

Virginia Gómez
Clerk of the Course

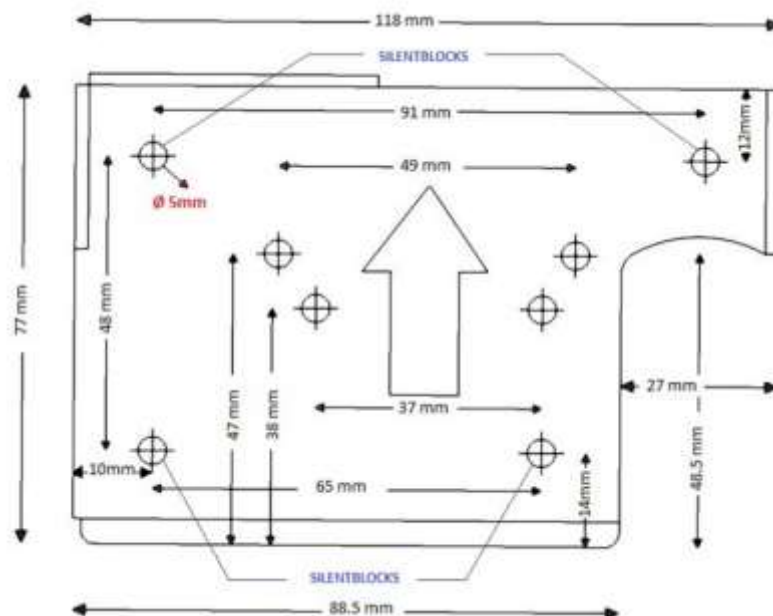

INSTALLATION KIT MANUAL BIKES / QUADS

IMPORTANT:

The Bike/Quad must be presented at scrutineering with the bracket, cabling and antennas mounted, ready to receive the STELLA 3

KIT COMPOSITION:

- 1 : Bracket
- 2 : Power Cable
- 3 : Iridium antenna
- 4 : RF antenna and clamping
- 5 : RF wire connector
- 6 : Sticker



BRACKET


Bracket must be installed on the handlebar or navigation panel, Stella 3 buttons **must be visible and accessible by the rider in case of emergency.**

It is mandatory to leave the cables with at least 15 cm of clearance for later connections.

POWER CABLE

Connect **RED** wire to **+12v** and **GREY** wire to **negative**
It must be connected directly to the battery (no breaker and no Contact on power)

We recommend to install a 3A fuse (not included)
Then, bring power connector close to bracket

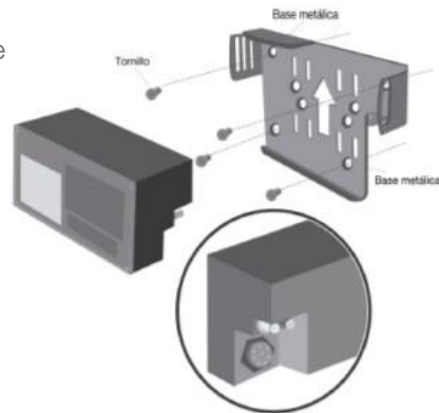

ANTENNAS: Iridium and radio frequency

The antennas must be installed in front of the bike / quad
We recommend ..middle of the front fender, the top of the bubble or the head of instrumentation).

It is strongly advised to place plastic collars and tape to maintain the antennas. They must be installed clear of all metal o carbon fiber obstacles.



INSTALLATION KIT MANUAL BIKES / QUADS

IMPORTANT:

The Bike/Quad must be presented at scrutineering with the bracket, cabling and antennas mounted, ready to receive the STELLA 3

KIT COMPOSITION:

- 1 : Bracket
- 2 : Power Cable
- 3 : Iridium antenna
- 4 : RF antenna and clamping
- 5 : RF wire connector
- 6 : Sticker



BRACKET


Bracket can be mounted on the dashboard or in the copilot roll bar, Stella 3 buttons **must be visible and accessible by the rider in case of emergency.**

It is mandatory to leave the cables with at least 15 cm of clearance for later connections.

POWER CABLE

Connect **RED** wire to **+12v** and **GREY** wire to **negative**
It must be connected directly to the battery (no breaker and no contact on power)

We recommend to install a 3A fuse (not included)
Then, bring power connector close to bracket

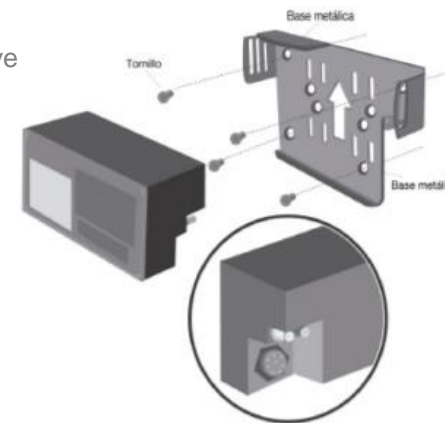

ANTENNAS: Iridium and radio frequency

Antennas must be installed in front of the bike / quad
We recommend ..middle of the front fender, the top of the bubble or the head of instrumentation).

It is strongly advised to place plastic collars and tape to maintain the antennas. They must be installed clear of all metal o carbon fiber obstacles.

